

Cutter Detonator

DET-3050-009LS (18" Leads)

Fluid Sensitive

No Fire Current: .2 Amps

All Fire Current: .8 Amps

Resistance: 51 Ohms

Temperature Rating: 475° F 1 Hr.

Static Sensitivity: MIL-DTL-23659D



Recommended Application: Split Shot and Small Tubing Cutters

Cutter Detonator

DET-3050-009L (18" Leads)

Fluid Sensitive


No Fire Current: .2 Amps

All Fire Current: .8 Amps

Resistance: 51 Ohms

Temperature Rating: 475° F 1 Hr.

Static Sensitivity: MIL-DTL-23659D

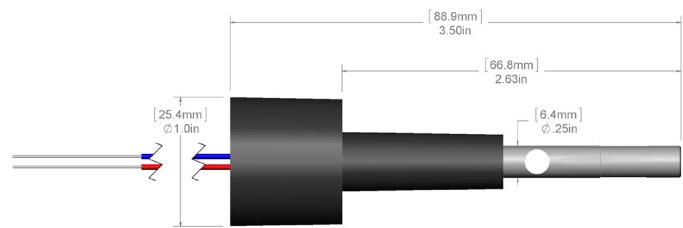

Recommended Application: Tubing Cutters and Casing Cutters

Cutter Detonator

DET-3050-009E

Fluid Sensitive


No Fire Current: .2 Amps

All Fire Current: .8 Amps

Resistance: 51 Ohms

Temperature Rating: 475° F 1 Hr.

Static Sensitivity: MIL-DTL-23659D

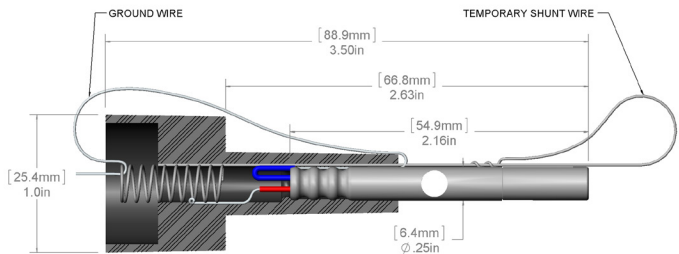

Alternate Application: Tubing Cutters

Cutter Detonator

DET-3050-009

Fluid Sensitive


No Fire Current: .2 Amps

All Fire Current: .8 Amps

Resistance: 51 Ohms

Temperature Rating: 475° F 1 Hr.

Static Sensitivity: MIL-DTL-23659D

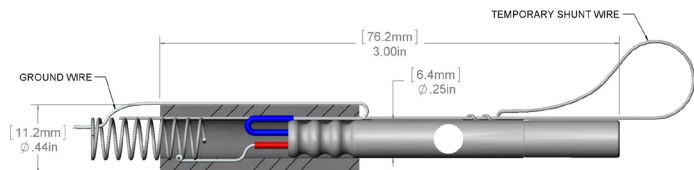

Alternate Application: Tubing Cutters

Consult **Responsibilities of Purchaser/User and Disclaimer of Warranties and Representations** on page 1.0 of the Detonator section prior to each purchase, use or handling of these products. Contact Owen Oil Tools at 1-817-551-0540, or 1-800-333-6936 in the United States, for addition copies.