

**DET-3050-127BP**

Black Powder Percussion Igniter

Size: .292" o.d. x 1.400" Ing.

Temperature Rating: 225°F 1 hr.


200°F 24 hrs.

Base Load: 15 grains Black Powder

Primer: Low-Temp

Firing Pin Configuration: .090 Dia. Full Radius

.062 - .077" Depth, Max.

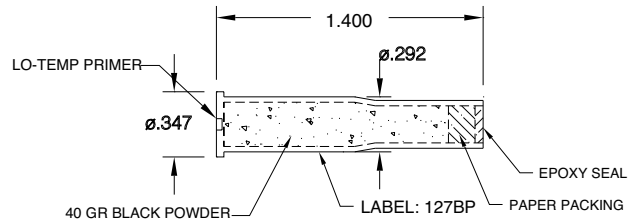

Recommended Application: Slickline/  
Percussion Power Charge Igniter.


**DET-3050-551**

Time Delay Fuse

Size: .750" o.d. x 15.400" Ing.

Main Load: 40 grams Time Delay Mix

Temperature Rating: 450°F / 100 hrs

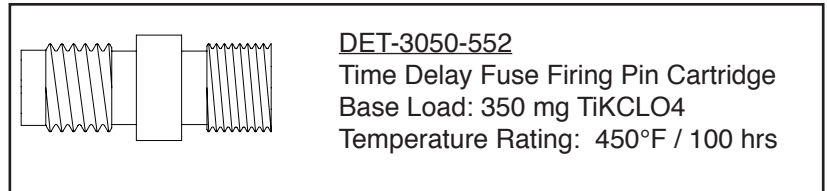


**DET-3050-552**

Time Delay Fuse Firing Pin Cartridge

Base Load: 350 mg TiKCLO4

Temperature Rating: 450°F / 100 hrs

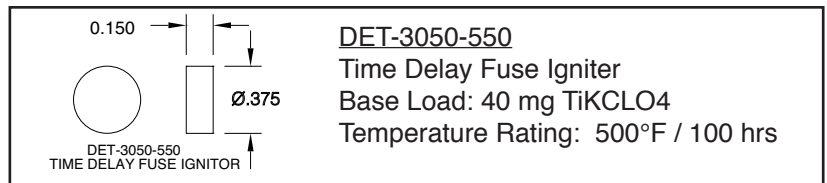


**DET-3050-550**

Time Delay Fuse Igniter

Base Load: 40 mg TiKCLO4

Temperature Rating: 500°F / 100 hrs

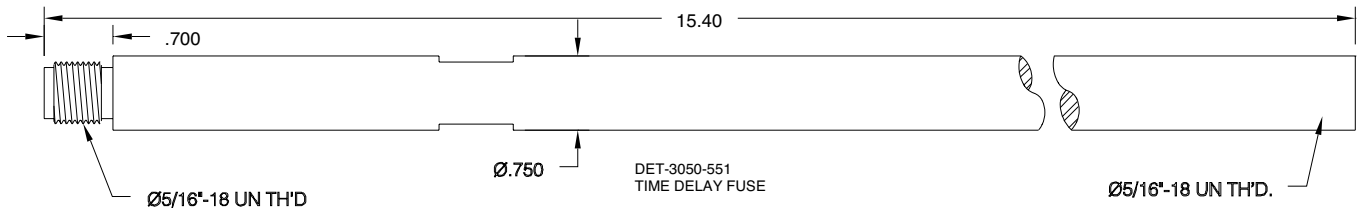

Consult **Responsibilities of Purchaser/User and Disclaimer of Warranties and Representations** on page 1.0 of the Detonator section prior to each purchase, use or handling of these products. Contact Owen Oil Tools at 1-817-551-0540, or 1-800-333-6936 in the United States, for addition copies.