

DET-3050-134A Pacific Scientific CP Detonator **(available in Canada)**

(p/n: 51-6956-3)

Size: 1.110" o.d. x .851" lng.

Material: Stainless Steel

Explosive: 350 mg. CP

No-Fire: 5 ft-lbs.

All-Fire: 10 ft-lbs. applied at 9.7 ft./sec.


Firing Pin Configuration: .050 Spherical Radius, 60° Point

Temperature Rating: 340°F 100 Hours

300°F 200 Hours

Initiation Gap: Ignites HMX or PYX Bi-Directional Booster at 1.25" gap.

Pressure Rating: 20,000 PSI before and after function

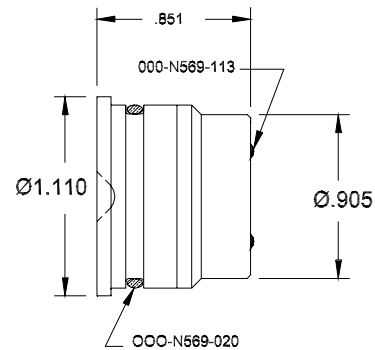

Recommended Application:
High-Temp Sealed TCP Detonator

DET-3050-134B Percussion Initiator

(p/n: D-N TDZ1305)

Size: 1.110" o.d. x .851" lng.

Material: 304 Stainless Steel

Explosive: 450 mg. HNS

No-Fire: 5 ft-lbs.

All-Fire: 10 ft-lbs. applied at 9.7 ft./sec.


Firing Pin Configuration: .050 Spherical Radius, 60° Point

Temperature Rating: 482°F 1Hour

446°F 100 Hours

Initiation Gap: Ignites HMX or PYX Bi-Directional Booste at 1.25" gap.

Pressure Rating: 20,000 PSI before and after function

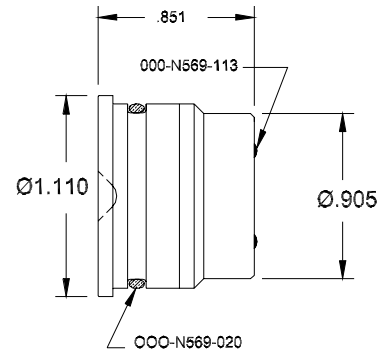

Recommended Application:
High-Temp Sealed TCP Detonator

Consult **Responsibilities of Purchaser/User and Disclaimer of Warranties and Representations** on page 1.0 of the Detonator section prior to each purchase, use or handling of these products. Contact Owen Oil Tools at 1-817-551-0540, or 1-800-333-6936 in the United States, for additional copies.