




008
DET-3050-008
No Fire Current: .2 Amps
All Fire Current: 1.0 Amp
Resistance: 51 Ohms
Temperature Rating: 475°F 1 Hr.
Static Sensitivity: MIL-DTL-23659D

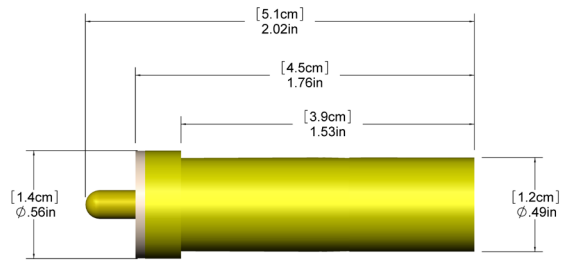

Detonator is shunted until button is depressed.

Recommended Application: Top Fire Scalloped guns

Consult **Responsibilities of Purchaser/User and Disclaimer of Warranties and Representations** on page 1.0 of the Detonator section prior to each purchase, use or handling of these products. Contact Owen Oil Tools at 1-817-551-0540, or 1-800-333-6936 in the United States, for addition copies.