


TECHNICAL INFORMATION:

2-750" Select Fire Operations with Pressure Switches

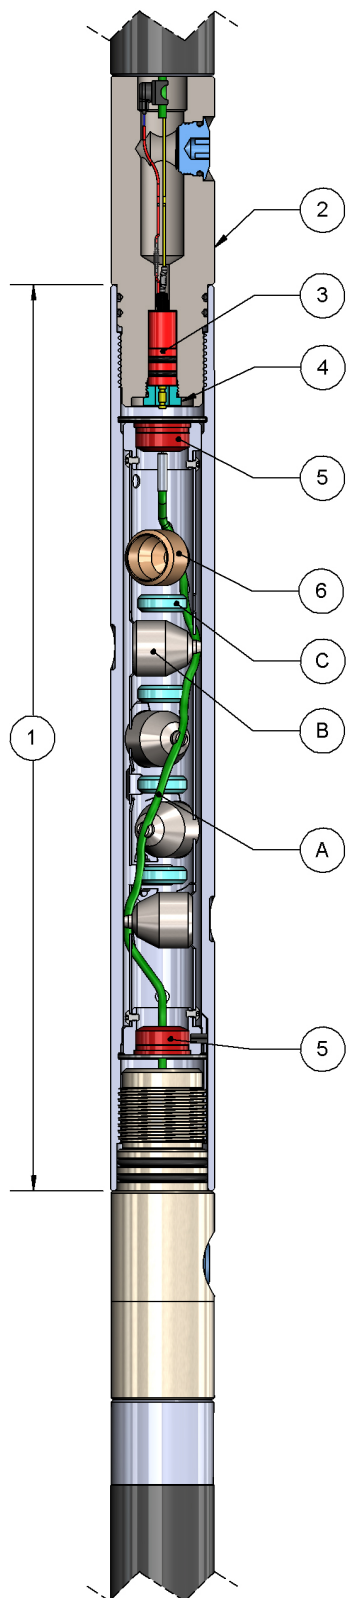

ITEM	PART NUMBER	DESCRIPTION
1	S27-0545-A02AK	Ship Assy, 2-3/4" X 2', 60° (4 charges, 4 pellets, 1 blank case)
	S27-0545-A03AK	Ship Assy, 2-3/4" X 3', 60° (9 charges, 8 pellets, 1 blank case)
	S27-0545-A04AK	Ship Assy, 2-3/4" X 4', 60° (14 charges, 12 pellets, 1 blank case)
2	-	Select Fire Tandem Sub
3	-	Select Fire Pressure Switch
4	TAG-0100-039	End Plate Insert (2 per gun as shown)
5	CAS-1240-005	Blank Case (shown in gold)
A	A570010	Detonating Cord, 80 gr., RDX, XHV
	A571017	Detonating Cord, 80 gr., HMX, XHV
B	PFC-2717-334	Charge, 2-3/4" HERO®PerFRAC, 0.34" EH, RDX (50/box)
	PFC-2717-434	Charge, 2-3/4" HERO®PerFRAC, 0.34" EH, HMX (50/box)
C	KOD-2750-420	KODIAK Pellet 2-3/4", 400°F f/ 1 hour, 20gm (54/box)

SPECIFICATIONS:

PRESSURE RATING	172.4 MPa	25,000 psi
TEMPERATURE	Up to 204°C	Up to 400°F
TENSILE STRENGTH	93 400 daN	210,000 lbs
CARRIER THREAD	2-3/8"-6 Stub Acme	
GUN WEIGHT LOADED	12.8 kg/m	8.45 lb/ft
GUN SWELL	75.1 mm	2.96-in.