


TECHNICAL INFORMATION:

3.125" Select Fire Operations with Pressure Switches

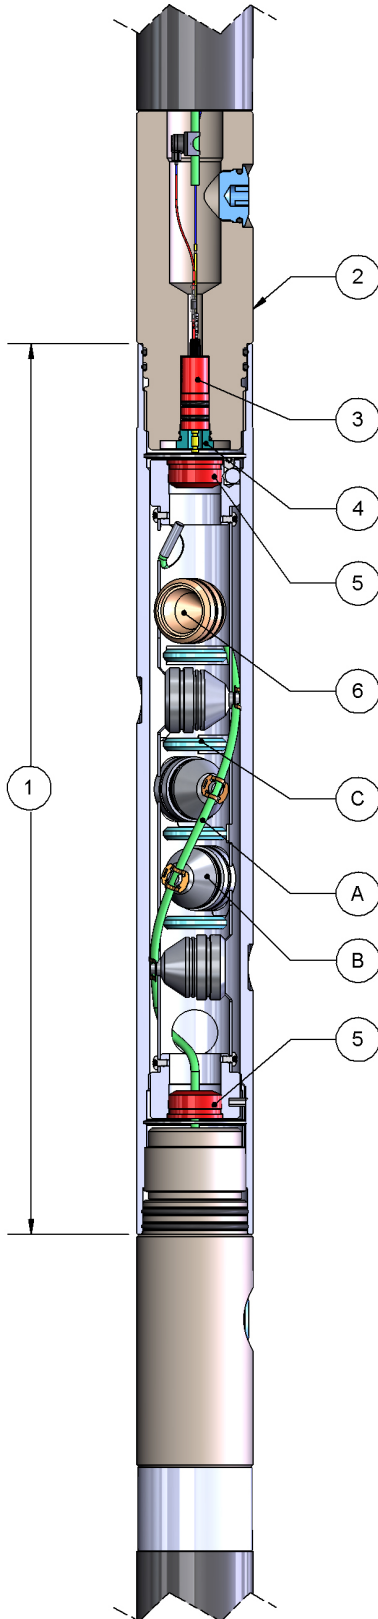

ITEM	PART NUMBER	DESCRIPTION
1	S31-0546-A02AK	Ship Assy, 3-1/8"X 2', 60° (4 charges, 4 pellets, 1 blank case)
	S31-0546-A025AK	Ship Assy, 3-1/8"X 2' 5", 60° (6 charges, 6 pellets, 1 blank case)
	S31-0546-A04AK	Ship Assy, 3-1/8"X 4', 60° (14 charges, 12 pellets, 1 blank case)
2	-	Select Fire Tandem Sub
3	-	Select Fire Pressure Switch
4	TAG-0100-040	End Plate Insert (2 per gun as shown)
5	CAS-1365-002	Blank Case (shown in gold)
A	A570010	Detonating Cord, 80 gr., RDX, XHV
	A571017	Detonating Cord, 80 gr., HMX, XHV
B	PFC-3121-336	Charge, 3-1/8" HERO®PerFRAC, 0.36" EH, RDX (50/box)
	PFC-3121-436	Charge, 3-1/8" HERO®PerFRAC, 0.36" EH, HMX (50/box)
	PFC-3121-342	Charge, 3-1/8" HERO®PerFRAC, 0.42" EH, RDX (50/box)
	PFC-3121-442	Charge, 3-1/8" HERO®PerFRAC, 0.42" EH, HMX (50/box)
	PFC-3121-346	Charge, 3-1/8" HERO®PerFRAC, 0.46" EH, RDX (50/box)
	PFC-3121-446	Charge, 3-1/8" HERO®PerFRAC, 0.46" EH, HMX (50/box)
C	KOD-3125-425	KODIAK Pellet 3-1/8" - 3-3/8" 400°F, 25g (54/box)

SPECIFICATIONS:

PRESSURE RATING	144.8 MPa	21,000 psi
TEMPERATURE	Up to 204°C	Up to 400°F
TENSILE STRENGTH	80 070 daN	180,000 lbs
CARRIER THREAD	2-3/4"-6 Stub Acme	
GUN WEIGHT LOADED	19.3 kg/m	13.0 lb/ft
GUN SWELL	86.4 mm	3.4-in.