


TECHNICAL INFORMATION:

3.375" Select Fire Operations with Addressable Switches

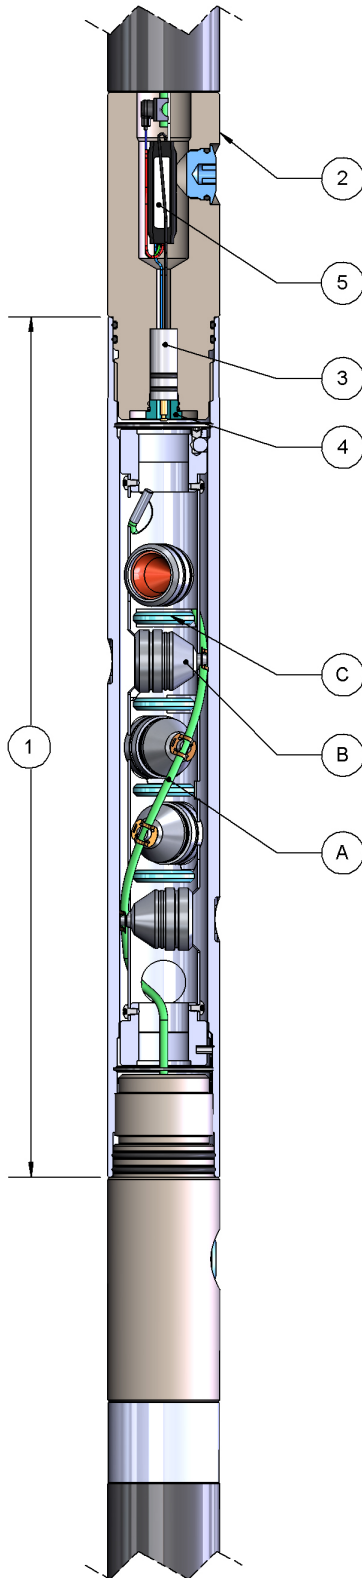

ITEM	PART NUMBER	DESCRIPTION
1	S33-0546-A025AK	Ship Assy, 3-3/8" X 2' 5", 60° (7 charges, 6 pellets)
	S33-0546-A04AK	Ship Assy, 3-3/8" X 4', 60° (15 charges, 12 pellets)
2	-	Select Fire Tandem Sub
3	-	Select Fire Feed Thru
4	-	Select Fire Addressable Switch
A	A570010	Detonating Cord, 80 gr., RDX, XHV
	A571017	Detonating Cord, 80 gr., HMX, XHV
B	PFC-3121-336	Charge, 3-1/8" HERO®PerFRAC, 0.36" EH, RDX (50/box)
	PFC-3121-436	Charge, 3-1/8" HERO®PerFRAC, 0.36" EH, HMX (50/box)
	PFC-3121-342	Charge, 3-1/8" HERO®PerFRAC, 0.42" EH, RDX (50/box)
	PFC-3121-442	Charge, 3-1/8" HERO®PerFRAC, 0.42" EH, HMX (50/box)
	PFC-3121-346	Charge, 3-1/8" HERO®PerFRAC, 0.46" EH, RDX (50/box)
	PFC-3121-446	Charge, 3-1/8" HERO®PerFRAC, 0.46" EH, HMX (50/box)
C	KOD-3125-425	KODIAK Pellet 3-1/8" - 3-3/8" 400°F, 25g (54/box)

SPECIFICATIONS:

PRESSURE RATING	137.9 MPa	20,000 psi
TEMPERATURE	Up to 204°C	Up to 400°F
TENSILE STRENGTH	89 000 daN	200,000 lbs
CARRIER THREAD	2-13/16"-6 Stub Acme	
GUN WEIGHT LOADED	23.8 kg/m	16.0 lb/ft
GUN SWELL	93.3 mm	3.675-in.