


TECHNICAL INFORMATION:

3.375" Select Fire Operations with Pressure Switches

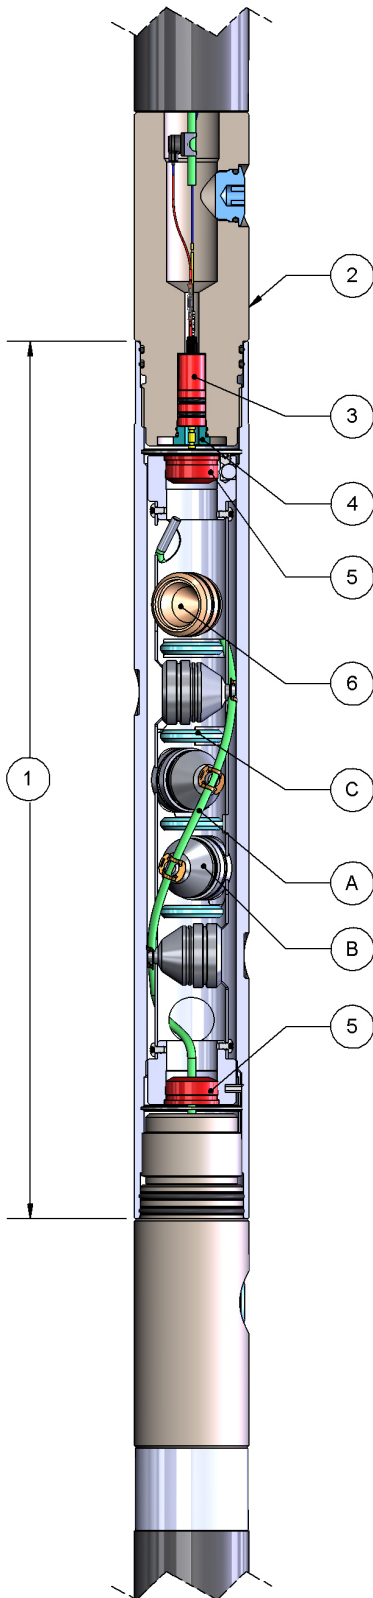

| ITEM | PART NUMBER | DESCRIPTION |
|------|-----------------|--|
| | S33-0546-A025AK | Ship Assy, 3-3/8"X 2' 5", 60° (6 charges, 6 pellets, 1 blank case) |
| | S33-0546-A04AK | Ship Assy, 3-3/8"X 4', 60° (14 charges, 12 pellets, 1 blank case) |
| 2 | - | Select Fire Tandem Sub |
| 3 | - | Select Fire Pressure Switch |
| 4 | TAG-0100-040 | End Plate Insert (2 per gun as shown) |
| 5 | CAS-1365-002 | Blank Case (shown in gold) |
| A | A570010 | Detonating Cord, 80 gr., RDX, XHV |
| | A571017 | Detonating Cord, 80 gr., HMX, XHV |
| B | PFC-3121-336 | Charge, 3-1/8" HERO®PerFRAC, 0.36" EH, RDX (50/box) |
| | PFC-3121-436 | Charge, 3-1/8" HERO®PerFRAC, 0.36" EH, HMX (50/box) |
| | PFC-3121-342 | Charge, 3-1/8" HERO®PerFRAC, 0.42" EH, RDX (50/box) |
| | PFC-3121-442 | Charge, 3-1/8" HERO®PerFRAC, 0.42" EH, HMX (50/box) |
| | PFC-3121-346 | Charge, 3-1/8" HERO®PerFRAC, 0.46" EH, RDX (50/box) |
| | PFC-3121-446 | Charge, 3-1/8" HERO®PerFRAC, 0.46" EH, HMX (50/box) |
| C | KOD-3125-425 | KODIAK Pellet 3-1/8" - 3-3/8" 400°F, 25g (54/box) |

SPECIFICATIONS:

| | | |
|-------------------|----------------------|-------------|
| PRESSURE RATING | 137.9 MPa | 20,000 psi |
| TEMPERATURE | Up to 204°C | Up to 400°F |
| TENSILE STRENGTH | 89 000 daN | 200,000 lbs |
| CARRIER THREAD | 2-13/16"-6 Stub Acme | |
| GUN WEIGHT LOADED | 23.8 kg/m | 16.0 lb/ft |
| GUN SWELL | 93.3 mm | 3.675-in. |