

**TECHNICAL INFORMATION:**

**GTX-2875-002, 2.875 INCH 7.9 PPF.**



CASING O.D. (in)	2.875
CASING WT. (lb/ft)	7.9
CASING I.D. (in)	2.323
PATCH MAX. RUNNING O.D. (in)	2.200
PATCH I.D. AFTER SETTING (in)	1.500
PATCH DRIFT I.D. (in)	1.375
BURST HYDRAULIC RATING (psi)	9000
COLLAPSE HYDRAULIC RATING (psi)	9000
BURST GAS RATING (psi)	9000
COLLAPSE GAS RATING (psi)	9000

QTY.	DESCRIPTION	PART NUMBER	MATERIAL
	GTX-2875-002	GTX-SPAN SYSTEM	NOTED
4	GTX-2875-79-70HSN	ELASTOMER	HSN
1	GTX-2875-030	PIN ELEMENT	4140 / 4142
1	GTX-2875-031	BOX ELEMENT	4140 / 4142
1	GTX-2875-034	TOP SWAGE	4140 / 4142
1	GTX-2875-035	BOTTOM SWAGE	4140 / 4142
1	OOO-V569-131	O-RING	VITON
1	OOO-V569-132	O-RING	VITON
1	PAT-2875-048A	RELEASE RING	STL-12L4-150
1	GTX-2875-0079-1010	10 FT. SECTION	L-80
	GTX-2875-0079-1005	5 FT. SECTION	L-80
	GTX-2875-0079-1020	20 FT. SECTION	L-80
	GTX-2875-0079-1002	2 FT. SECTION	L-80

MINIMUM EQUIPMENT REQUIRED FOR A FULL SYSTEM CONSISTS OF ONE SHORT ASSEMBLY AND ONE SECTION.

**PRODUCT OFFERINGS:**


GTX-SPAN provides a gas tight system to the industry which is effective, reliable, and economical. The system is durable and dependable as an isolation method of perforations, splits, corrossions or leaks in most types of tubulars. This system as well as our current X-SPAN<sup>®</sup> System can be designed using premium alloys for extreme well bore environments and custom sized for most tubing restrictions.

**BENEFITS/CAPABILITIES:**

- Economical and reliable solution for water shut-off / zonal isolation
- Large bore assures easy passage of service tools
- Minimal surface equipment and one trip system results in savings
- Well interventions may be performed on flowing or static wells
- Easily deployed using a range of pyrotechnic multistage or hydraulic setting tools

**TECHNICAL INFORMATION:**

## GTX-2875-002, 2.875 INCH 7.9 PPF.

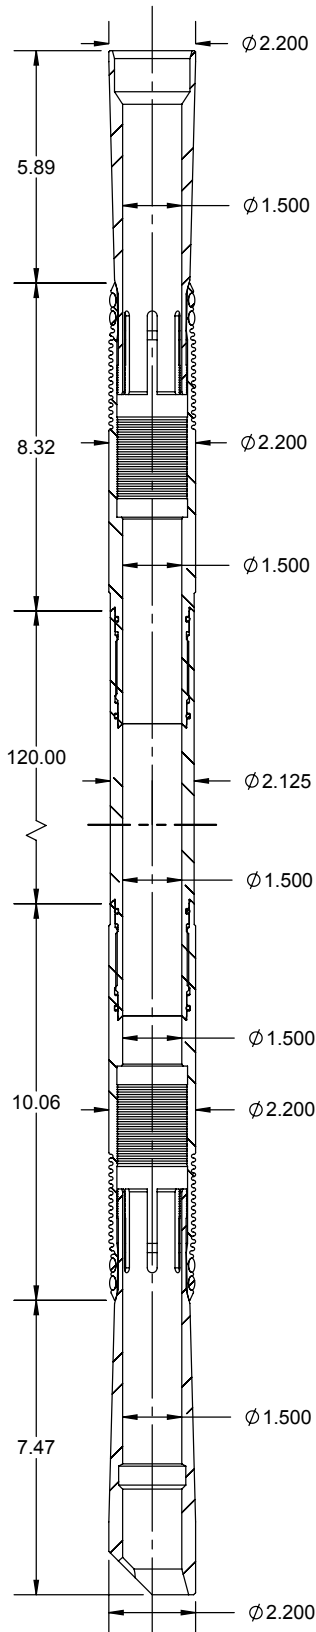

CASING O.D. (in)	2.875
CASING WT. (lb/ft)	7.9
CASING I.D. (in)	2.323
PATCH MAX. RUNNING O.D. (in)	2.200
PATCH I.D. AFTER SETTING (in)	1.500
PATCH DRIFT I.D. (in)	1.375
BURST HYDRAULIC RATING (psi)	9000
COLLAPSE HYDRAULIC RATING (psi)	9000
BURST GAS RATING (psi)	9000
COLLAPSE GAS RATING (psi)	9000


QTY.	DESCRIPTION	PART NUMBER	MATERIAL
4	GTX-2875-79-70HSN	ELASTOMER	HSN
1	GTX-2875-030	PIN ELEMENT	4140-4142
1	GTX-2875-031	BOX ELEMENT	4140
1	GTX-2875-034	TOP SWAGE	4140/4142
1	GTX-2875-035	BOTTOM SWAGE	4140/4142
N+1	OOO-V569-131	O-RING	VITON
N+1	OOO-V569-132	O-RING	VITON
1	PAT-2875-048A	RELEASE RING	STL-12L4-150
1	GTX-2875-0079-1010	10 FT. SECTION	L-80
1	SET-2125-220	SLEEVE NUT	4140 / 4142
1	SET-2125-221	LOCK RING	13 CR
1	SET-2125-222	SETTING SLEEVE	4140 / 4142
1	SET-2125-130	QUICK CHANGE ROD	4340
1	SET-2125-131	QUICK CHANGE NUT	4340
1	SET-2125-132	TOP ADAPTER ROD	4130 / 4140 / 4142
N+1	SET-2125-133	ROD TANDEM CONNECTOR	4130 / 4140 / 4142
N	SET-2125-134	10 FT. ROD	4130 / 4140 / 4142
OPT.	SET-2125-135	5 FT. ROD	4130 / 4140 / 4142
1	SET-2125-136	BOTTOM ROD	4130 / 4140 / 4142
1	SET-2125-237	COLLET	4130 / 4140 / 4142
1	SET-2125-240	COLLET SUPPORT	4140 / 4142

MINIMUM EQUIPMENT REQUIRED FOR 10 FT. SYSTEM



**EXTENSION SPECIFICATIONS:**

**GTX-2875-002, 2.875 INCH 7.9 PPF.**

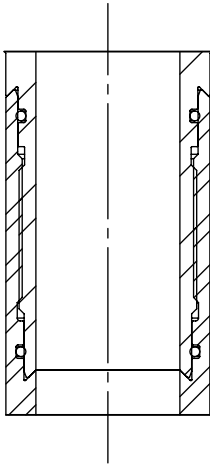

PART NUMBER	LENGTH	OAL	WEIGHT	MATERIAL
GTX-2875-0079-1002	26.99	24.08	11.9	L-80
GTX-2875-0079-1005	62.99	60.08	29.7	L-80
GTX-2875-0079-1010	122.99	120.08	60.6	L-80
GTX-2875-0079-1020	242.99	240.08	118.8	L-80

PATCH TENSILE RATING	47,000 LBF
----------------------	------------

**SYSTEM WEIGHTS**

	WEIGHT (LBS.)
GTX-2875-002	13.5
10 FT PATCH RUNNING WEIGHT	178.5
EA. ADDITIONAL 10 FT. LGTH ADD	88.8

**SETTING TOOL OPTIONS:**

HYDRAULIC			WEIGHT (LBS)
SET-2125-100	2-1/8 HYDRAULIC		150
	SCREEN SUB	OT0-798-231A	
	CIRCULATION SUB	SET-2125-200	

PYROTECHNIC			WEIGHT (LBS)
SET-2125-101	2-1/8 MSST		90
	POWER CHARGE	JEC-5334-104	
		JEC-0212-044	
	IGNITER	DET-5306-074	
		DET-5306-008	