

**TECHNICAL
INFORMATION:**

GTX-9625-0535-1001



CASING O.D. (in)	9.625
CASING WT. (lb/ft)	53.5
CASING I.D. (in)	8.535
PATCH MAX. RUNNING O.D. (in)	8.300
PATCH I.D. AFTER SETTING (in)	6.625
PATCH DRIFT I.D. (in)	6.500
BURST HYDRAULIC RATING (psi)	6200
COLLAPSE HYDRAULIC RATING (psi)	6200
BURST GAS RATING (psi)	5000
COLLAPSE GAS RATING (psi)	5000

QTY.	DESCRIPTION	PART NUMBER	MATERIAL
	GTX-SPAN SYSTEM	GTX-9625-0535-1001	NOTED
4	ELASTOMER	GTX-9625-0535-6000	HSN
1	PIN ELEMENT	GTX-9625-0535-1210	4140
1	BOX ELEMENT	GTX-9625-0535-1410	4140
1	TOP SWAGE	GTX-9625-0535-1110	4140 / 4142
1	BOTTOM SWAGE	GTX-9625-0535-1310	4140 / 4142
1	O-RING	OOO-V569-166	VITON
1	O-RING	OOO-V569-167	VITON
1	85K SHEAR STUD	PAT-9625-058	4140
1	10 FT SECTION	GTX-9625-0535-1010	L-80
	5 FT SECTION	GTX-9625-0535-1005	L-80

MINIMUM EQUIPMENT REQUIRED FOR A FULL SYSTEM CONSISTS OF ONE SHORT ASSEMBLY AND ONE SECTION.

PRODUCT OFFERINGS:


GTX-SPAN provides a gas tight system to the industry which is effective, reliable, and economical. The system is durable and dependable as an isolation method of perforations, splits, corruptions or leaks in most types of tubulars. This system as well as our current X-SPAN[®] System can be designed using premium alloys for extreme well bore environments and custom sized for most tubing restrictions.

BENEFITS/CAPABILITIES:

- Economical and reliable solution for water shut-off / zonal isolation
- Large bore assures easy passage of service tools
- Minimal surface equipment and one trip system results in savings
- Well interventions may be performed on flowing or static wells
- Easily deployed using a range of pyrotechnic multistage or hydraulic setting tools

**TECHNICAL
INFORMATION:**

GTX-9625-0535-1001

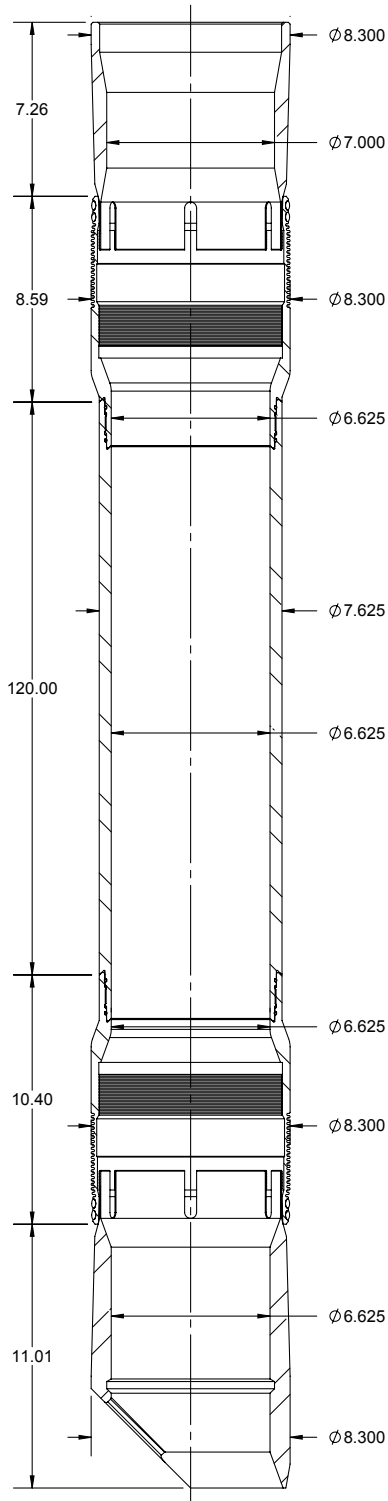

CASING O.D. (in)	9.625
CASING WT. (lb/ft)	53.5
CASING I.D. (in)	8.535
PATCH MAX. RUNNING O.D. (in)	8.300
PATCH I.D. AFTER SETTING (in)	6.625
PATCH DRIFT I.D. (in)	6.500
BURST HYDRAULIC RATING (psi)	6200
COLLAPSE HYDRAULIC RATING (psi)	6200
BURST GAS RATING (psi)	5000
COLLAPSE GAS RATING (psi)	5000

QTY.	DESCRIPTION	PART NUMBER	MATERIAL
4	ELASTOMER	GTX-9625-0535-6000	HSN
1	PIN ELEMENT	GTX-9625-0535-1210	4140
1	BOX ELEMENT	GTX-9625-0535-1410	4140
1	TOP SWAGE	GTX-9625-0535-1110	4140 / 4142
1	BOTTOM SWAGE	GTX-9625-0535-1310	4140 / 4142
N+1	O-RING	OOO-V569-166	VITON
N+1	O-RING	OOO-V569-167	VITON
1	85K SHEAR STUD	PAT-9625-058	4140
1	SET SCREW 1/4 INCH X 20 TPI, 5/16 INCH	PUR-0501-030	ALLOY
N	10 FT SECTION	GTX-9625-0535-1010	L-80
1	SETTING SLEEVE	SET-4500-032A	4130 / 4140
1	SLEEVE LOCK NUT	SET-4500-033	4130 / 4140
1	SETTING SLEEVE	SET-4500-241	4140 / 4142
1	TOP ADAPTER ROD	SET-3250-132	4130 / 4140
N+1	ROD TANDEM CONNECTOR	SET-3250-133	4130 / 4140
N	10 FT. ROD	SET-3250-134	4130 / 4140
OPT.	5 FT ROD	SET-3250-135	4130 / 4140
1	BOTTOM ADAPTER ROD	SET-3250-217	4130 / 4140
1	COLLET SUPPORT	SET-4500-227	4140 / 4142
1	COLLET ASSEMBLY	SET-4500-224	N/A
1	COLLET BODY	SET-4500-225	4140 / 4142
1	COLLET END SUB	SET-4500-226	4140 / 4142
1	ROD SUPPORT	SET-4500-228	ALUMINIUM
1	COLLET SUPPORT	SET-3250-227	4143 / 4140
N	ROD SUPPORT	SET-3250-238	ALUMINIUM

MINIMUM EQUIPMENT REQUIRED FOR 10 FT. SYSTEM

EXTENSION SPECIFICATIONS:

GTX-9625-0535-1001



PART NUMBER	LENGTH	OAL	WEIGHT	MATERIAL
GTX-9625-0535-1010	120	121.9	189	L-80
GTX-9625-0535-1005	60	61.9	380	L-80

PATCH TENSILE RATING	150,000
----------------------	---------

SYSTEM WEIGHTS

	WEIGHT (LBS.)
GTX-9625-0535-1001	115
10 FT PATCH RUNNING WEIGHT	742.5
EA. ADDITIONAL 10 FT. LGTH ADD	442

SETTING TOOL OPTIONS:

HYDRAULIC			WEIGHT (LBS)
4-1/2 INCH HYDRAULIC	SET-4500-010		880
3-1/8 INCH HYDRAULIC	SET-3125-010		300
	SCREEN SUB	TT0798-288A	
	CIRCULATION SUB	SET-2875-010	
	DUMP SUB	OT0710-288B-000	

PYROTECHNIC			WEIGHT (LBS)
3-1/4 INCH MULTISTAGE SETTING TOOL	SET-3250-000		206
	POWER CHARGE	OPC-3250-000-MS	
	IGNITER	DET-5306-074	
		DET-5306-008	
4-1/2 INCH MULTISTAGE SETTING TOOL	SET-4500-000		700
	POWER CHARGE	JEC-0450-140	
	IGNITER	DET-5306-074	
		DET-5306-008	