

**TECHNICAL INFORMATION:**

**PAT-4500-0151-1001, 4.5 INCH 15.1 PPF.**



CASING O.D. (in)	4.5
CASING WT. (lb/ft)	15.1
CASING I.D. (in)	3.826
PATCH MAX. RUNNING O.D. (in)	3.600
PATCH I.D. AFTER SETTING (in)	2.992
PATCH DRIFT I.D. (in)	2.867
BURST HYDRAULIC RATING (psi)	9000
COLLAPSE HYDRAULIC RATING (psi)	9000

QTY.	DESCRIPTION	PART NUMBER	MATERIAL
	X-SPAN SYSTEM	PAT-4500-0151-1001	NOTED
1	PIN ELEMENT	PAT-4500-0151-3210	13 Cr
1	BOX ELEMENT	PAT-4500-0151-3410	13 Cr
1	TOP SWAGE	PAT-4500-084	4140
1	BOTTOM SWAGE	PAT-4500-085	4140
1	O-RING	OOO-V569-151	VITON
1	O-RING	OOO-V569-152	VITON
1	72K SHEAR RING	PAT-4500-772	4140 / 4142
1	10 FT. SECTION	GTX-4500-110	L-80
-		GTX-4500-110C	13 Cr
-	5FT SECTION	GTX-4500-105	L-80
-		GTX-4500-105C	13 Cr
-	20 FT SECTION	GTX-4500-120	L-80
-		GTX-4500-120C	13 Cr

MINIMUM EQUIPMENT REQUIRED FOR A FULL SYSTEM CONSISTS OF ONE SHORT ASSEMBLY AND ONE SECTION.

**PRODUCT OFFERINGS:**

The Owen X-SPAN® System is an economical, proven, durable and dependable sealing system for the isolation of perforations, splits, corrosion or leaks in all types of tubulars and conditions. This system can utilize a multitude of deployment methods in all types of well bores. The large bore assures easy passage of service tools including bridge plugs, drop balls, seal bore assemblies, logging tools and perforating systems. The minimal surface equipment required for deploying the patch and rig less intervention results in significant savings for the operator.


**BENEFITS/CAPABILITIES:**

The X-SPAN® System Offers:

- A proven, durable and dependable seal
- Deployment on electric wireline, tubing, drill pipe or coil tubing in vertical, deviated or horizontal or geothermal well bores
- An economical and reliable solution for a broad range of applications
- A large bore for easy passage of service tools
- Minimal surface equipment required for deployment

**TECHNICAL INFORMATION:**

**PAT-4500-0151-1001, 4.5 INCH 15.1 PPF.**

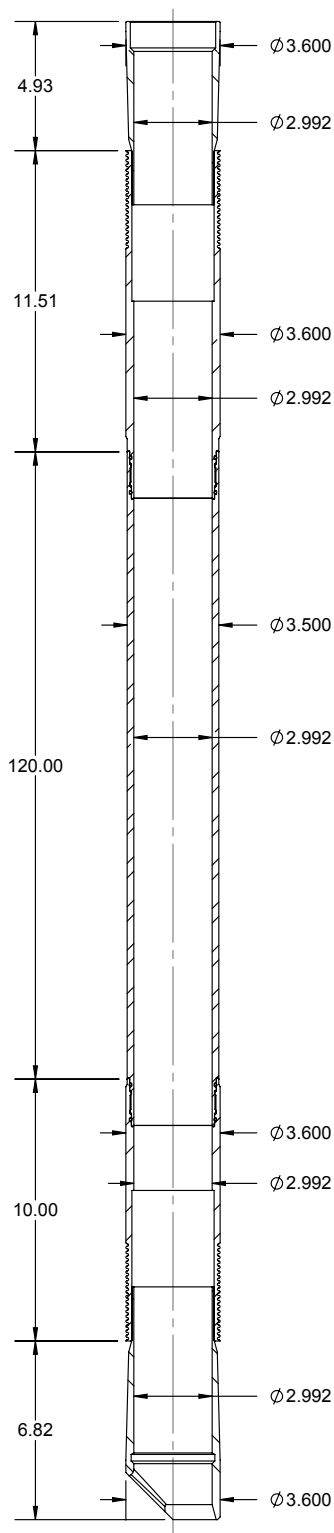


CASING O.D. (in)	4.5
CASING WT. (lb/ft)	15.1
CASING I.D. (in)	3.826
PATCH MAX. RUNNING O.D. (in)	3.600
PATCH I.D. AFTER SETTING (in)	2.992
PATCH DRIFT I.D. (in)	2.867
BURST HYDRAULIC RATING (psi)	9000
COLLAPSE HYDRAULIC RATING (psi)	9000

QTY.	DESCRIPTION	PART NUMBER	MATERIAL
1	BOX ELEMENT	PAT-4500-0151-3410	13 Cr
1	PIN ELEMENT	PAT-4500-0151-3210	13 Cr
1	TOP SWAGE	PAT-4500-084	4140
1	BOTTOM SWAGE	PAT-4500-085	4140
N+1	O-RING	OOO-V569-151	VITON
N+1	O-RING	OOO-V569-152	VITON
1	72K SHEAR RING	PAT-4500-772	4140 / 4142
1	SET SCREW 1/4 INCH X 20 TPI, 5/16 INCH	PUR-0501-030	ALLOY
N	10 FT. SECTION	GTX-4500-110	L-80
1	SLEEVE NUT	SET-3250-420	4140/4142
1	SETTING SLEEVE LOCK NUT	SET-3250-421	4140/4142
1	SETTING SLEEVE	SET-3250-422	4140/4142
1	QUICK CHANGE ROD	SET-3250-130	4130/4140
1	QUICK CHANGE NUT	SET-3250-131	4130/4140
1	TOP ADAPTER ROD	SET-3250-132	4130/4140
N+1	ROD TANDEM CONNECTOR	SET-3250-133	4140/4130
N	10 FT. ROD	SET-3250-134	4140 / 4130
OPT.	5 FT. ROD	SET-3250-135	4140 / 4130
1	BOTTOM ROD EXTENDED	SET-3250-136L	4140/4130
1	COLLET ASSEMBLY	SET-3250-747	SEE TABLE
	END SUB	SET-3250-745	4130 / 4140 / 4142
	COLLET	SET-3250-746	4130/4140/4142
1	COLLET SUPPORT	SET-3250-446	4140/4142
N	ROD SUPPORT	SET-3250-142A	ALUMINIUM

MINIMUM EQUIPMENT REQUIRED FOR 10 FT. SYSTEM

**EXTENSION SPECIFICATIONS:**

**PAT-4500-0151-1001, 4.5 INCH 15.1 PPF.**

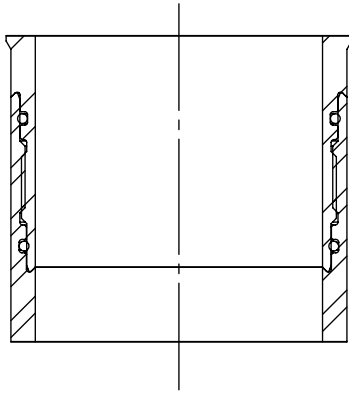

PART NUMBER	LENGTH	OAL	WEIGHT	MATERIAL
GTX-4500-102	24	25.82	17.22	L-80
GTX-4500-102C	24	25.82	17.22	13 Cr L80
GTX-4500-105	60	61.82	43.16	L-80
GTX-4500-105C	60	61.82	43.16	13 Cr L80
GTX-4500-110	120	121.82	86.4	L-80
GTX-4500-110C	120	121.82	86.4	13 Cr L80
GTX-4500-120	240	241.82	172.86	L-80
GTX-4500-120C	240	241.82	172.86	13 Cr L80

PATCH TENSILE RATING	63,000 LBF
----------------------	------------

**SYSTEM WEIGHTS:**

	WEIGHT (LBS.)
PAT-4500-0151-1001	25
10 FT PATCH RUNNING WEIGHT	218
EA. ADDITIONAL 10 FT. LGTH ADD	148

**SETTING TOOL OPTIONS:**

HYDRAULIC			WEIGHT (LBS)
3-1/8 INCH HYDRAULIC	SET-3125-010		300
	SCREEN SUB	TT0798-288A	
	CIRCULATION SUB	SET-2875-010	
	DUMP SUB	OT0710-288B-000	

PYROTECHNIC			WEIGHT (LBS)
3-1/4 INCH MULTISTAGE SETTING TOOL	SET-3250-000		206
	BOTTOM ADAPTER	SET-3250-431	
	POWER CHARGE	OPC-3250-000-MS	
	IGNITER	DET-5306-074	
		DET-5306-008	