


**APPLICATION / OPERATION**

- Electric wireline set
- Sets in any grade casing - including P-110
- Used for medium pressure and temperature applications
- Rated to 7,500 P.S.I at 200° F
- One-piece slips hardened to depth of wicker only
- Small O.D.'s for speed and safety when running
- Can be set on any wireline pressure setting tool
- Top set with shear ring
- Sets in proper sequence for positive pack-off and secure set
- Drillable cast iron construction
- For temporary or permanent service
- Designed for extra high pressure and rapid drill-out
- Plug stays set until gas pressure equalizes when drilling out

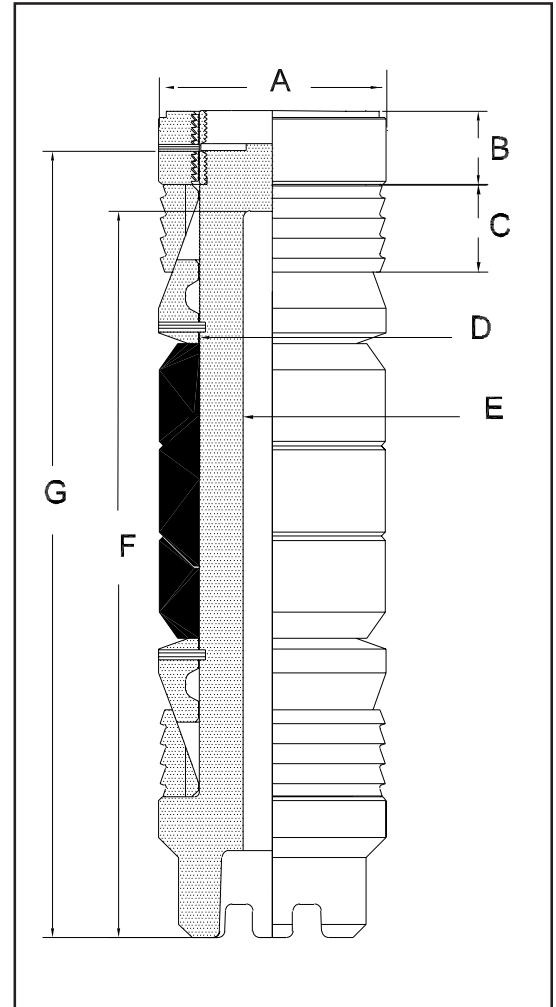

**SPECIFICATIONS**

Casing		Bridge Plug Part No.	Plug O.D.	Setting Range		Setting Force (lbs.)	Owen Setting Adapters (3-1/2" Set. Tool)			Baker Setting Adapters				
O.D.	Wt. (T&C)			Min.	Max.		Setting Sleeve	Setting Nut	Adapter Rod	Setting Sleeve	Setting Nut	Adapter Rod	Lock Spring	Setting Tool
4-1/2	9.5-16.6	PLG-3500-003	3.50	3.826	4.090	30,000	SET-5303-010	Not Req'd.	SET-5307-078	SET-5307-165	Not Req'd.	SET-5307-220	SET-5307-201 NO. 10	NO. 10
5-1/2	13-25	PLG-4240-003	4.24	4.580	5.047		SET-5307-081	SET-5307-079	SET-5303-093	SET-5307-217	SET-5307-079	SET-5307-222		
5-3/4	22.5-25.						SET-5307-163	SET-5307-167		SET-5307-080				
6-5/8	17-22	PLG-5610-003	5.61	5.989	6.655	55,000	SET-5307-082	SET-5307-080	SET-5307-167	SET-5307-080	SET-5307-221	SET-5307-202 NO. 20	NO. 20	
7	17-35													

**DIMENSIONAL DATA (INCHES)**

Plug Part No.	A	B	C	D	E	F	G
PLG-3500-003	3.500	1.25	1.62	2.125	1.10	13.56	14.81
PLG-4240-003	4.240	1.37	1.62	2.750	1.10	13.56	14.81
PLG-5610-003	5.610	1.62	2.18	3.687	2.37	17.25	19.00