


INTRODUCTION

The ADP-PX16-222, Safe Fire PX-1 Initiation System utilize Exploding Bridgewire technology to increase safety during firing operations.

Incorporation of the EBW into the Firing Systems adds increased safety against rig-site hazards such as R-F transmitters, cathodic protection, and stray voltages. The PX-1 EBW fireset allows normal oilfield operation to continue while perforating and other completion services are being performed.

All safety rules and regulations should be strictly followed when storing, handling, assembling, and using these tools and/or detonators. Safety precautions should be taken in accordance with your company's safety policies, governmental regulations, and the American Petroleum Institute Recommended Practice 67 (API RP-67).

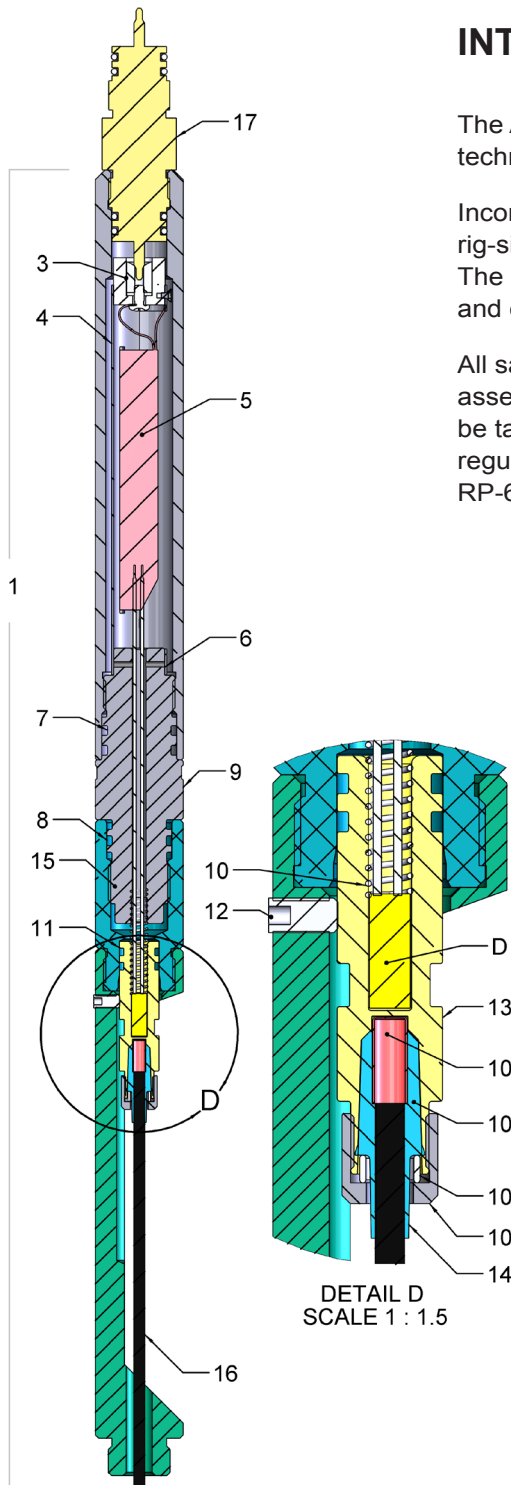

ITEM	PART NO.	DESCRIPTION
1	ADP-PX16-222	Assembly, Exposed Initiation PX-1 Firing System
2	ADP-PX16-102	Top Housing
3	ADP-PX16-107	Contact Assembly
4	SEV-1375-250	Carriage, PX1 Fireset
5	PUR-0610-008	PX-1 Fireset with Wire Outputs
6	PUR-0509-040	6-32 x 1/4 Pan Head Screw - 2 Required
7	OOO-V569-217	O-Ring, Viton - 2 Required
8	OOO-V569-214	O-Ring, Viton - 2 Required
9	ADP-PX16-231	Detonating Housing
10	ADP-PX16-235	Ecosse Sealing Kit
11	OOO-V569-113	O-Ring, Viton - 2 Required
12	PUR-0504-026	0.25 - 20 X 0.50 Set Screw
13	ADP-PX16-225	Booster Holder
14	PUR-6000-005	Seizing Cord (sold separately)
15	ADP-PX16-224	Firing Adapter
16	Ref Cord Chart	Detonating Cord (sold separately)
17	AES-8079	Logging GR BTM SUB, 1-3/8 (sold separately)
18	ADP-PX16-230	Blast Shield (sold separately)
D	EBW-RISI-800	EBW - RDX Detonator (sold separately)
	2-300180-3	EBW - CP Detonator (sold separately)
-	ADP-PX16-223	Redress Kit, includes items: 3 thru 8, 10 thru 13

REF MANUAL: MAN-PX1-008



Note: To fire DC (+); connect the white/black wire to ground and connect the red wire to hot.