




SPECTRASCAN Imager is a memory spectroscopy analytical log designed to identify and precisely determine near wellbore proppant placement along the axis of the wellbore during the hydraulic fracturing operation.

SPECTRASCAN

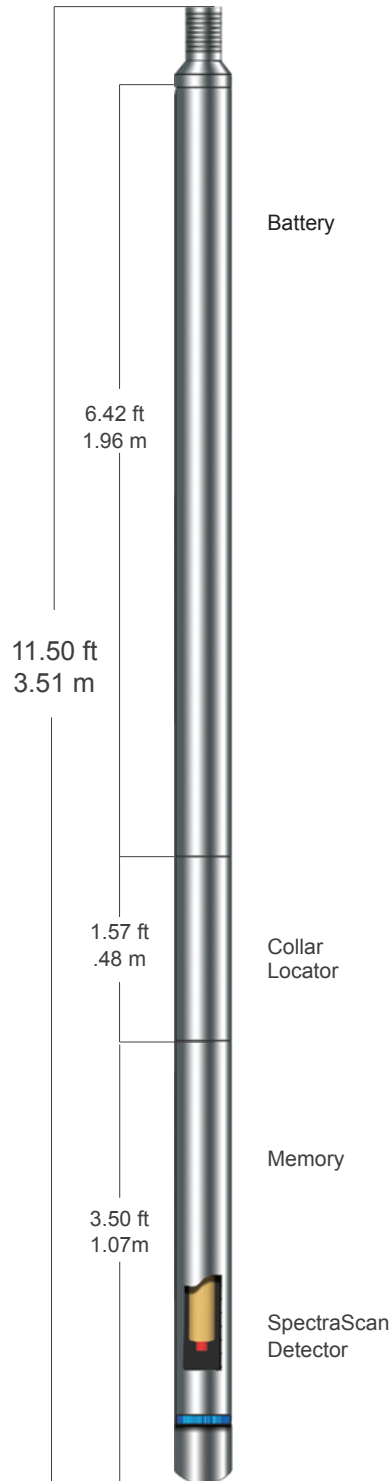

### ADVANCED FEATURES

- 3,000 Channel Energy Spectrum
- **Prolmage** -log printout for detailed scale wellbore schematic
- 60 Hour Memory
- Versatile Deployment Options
- Continuous Downhole Calibration

### CONNECTION

Standard 5/8" sucker rod

### TOOL COMPONENTS

- Batteries/ High Temperature Lithium
- Detectors:
  - SPECTRASCAN - Spectral Gamma Ray

### DEPLOYMENT METHODS

- Washpipe
- Slickline
- Electric Line
- Tubing/ Coiled Tubing

### TOOL SPECIFICATIONS

Temperature:	up to 300F/ 150C	up to 350F/ 176C
Pressure:	20,000psi	20,000psi
Outside Diameter:	1.69in/ 43mm	1.75in/ 44.45mm
Length:	11.5ft/ 3.51m	11.5ft/ 3.51m

Tool Specification